


RCE-810



**Hand Held
CCD Barcode Scanner**

- High Performance
- Intelligent Decoding
- Light Weight
- Sleek Shape

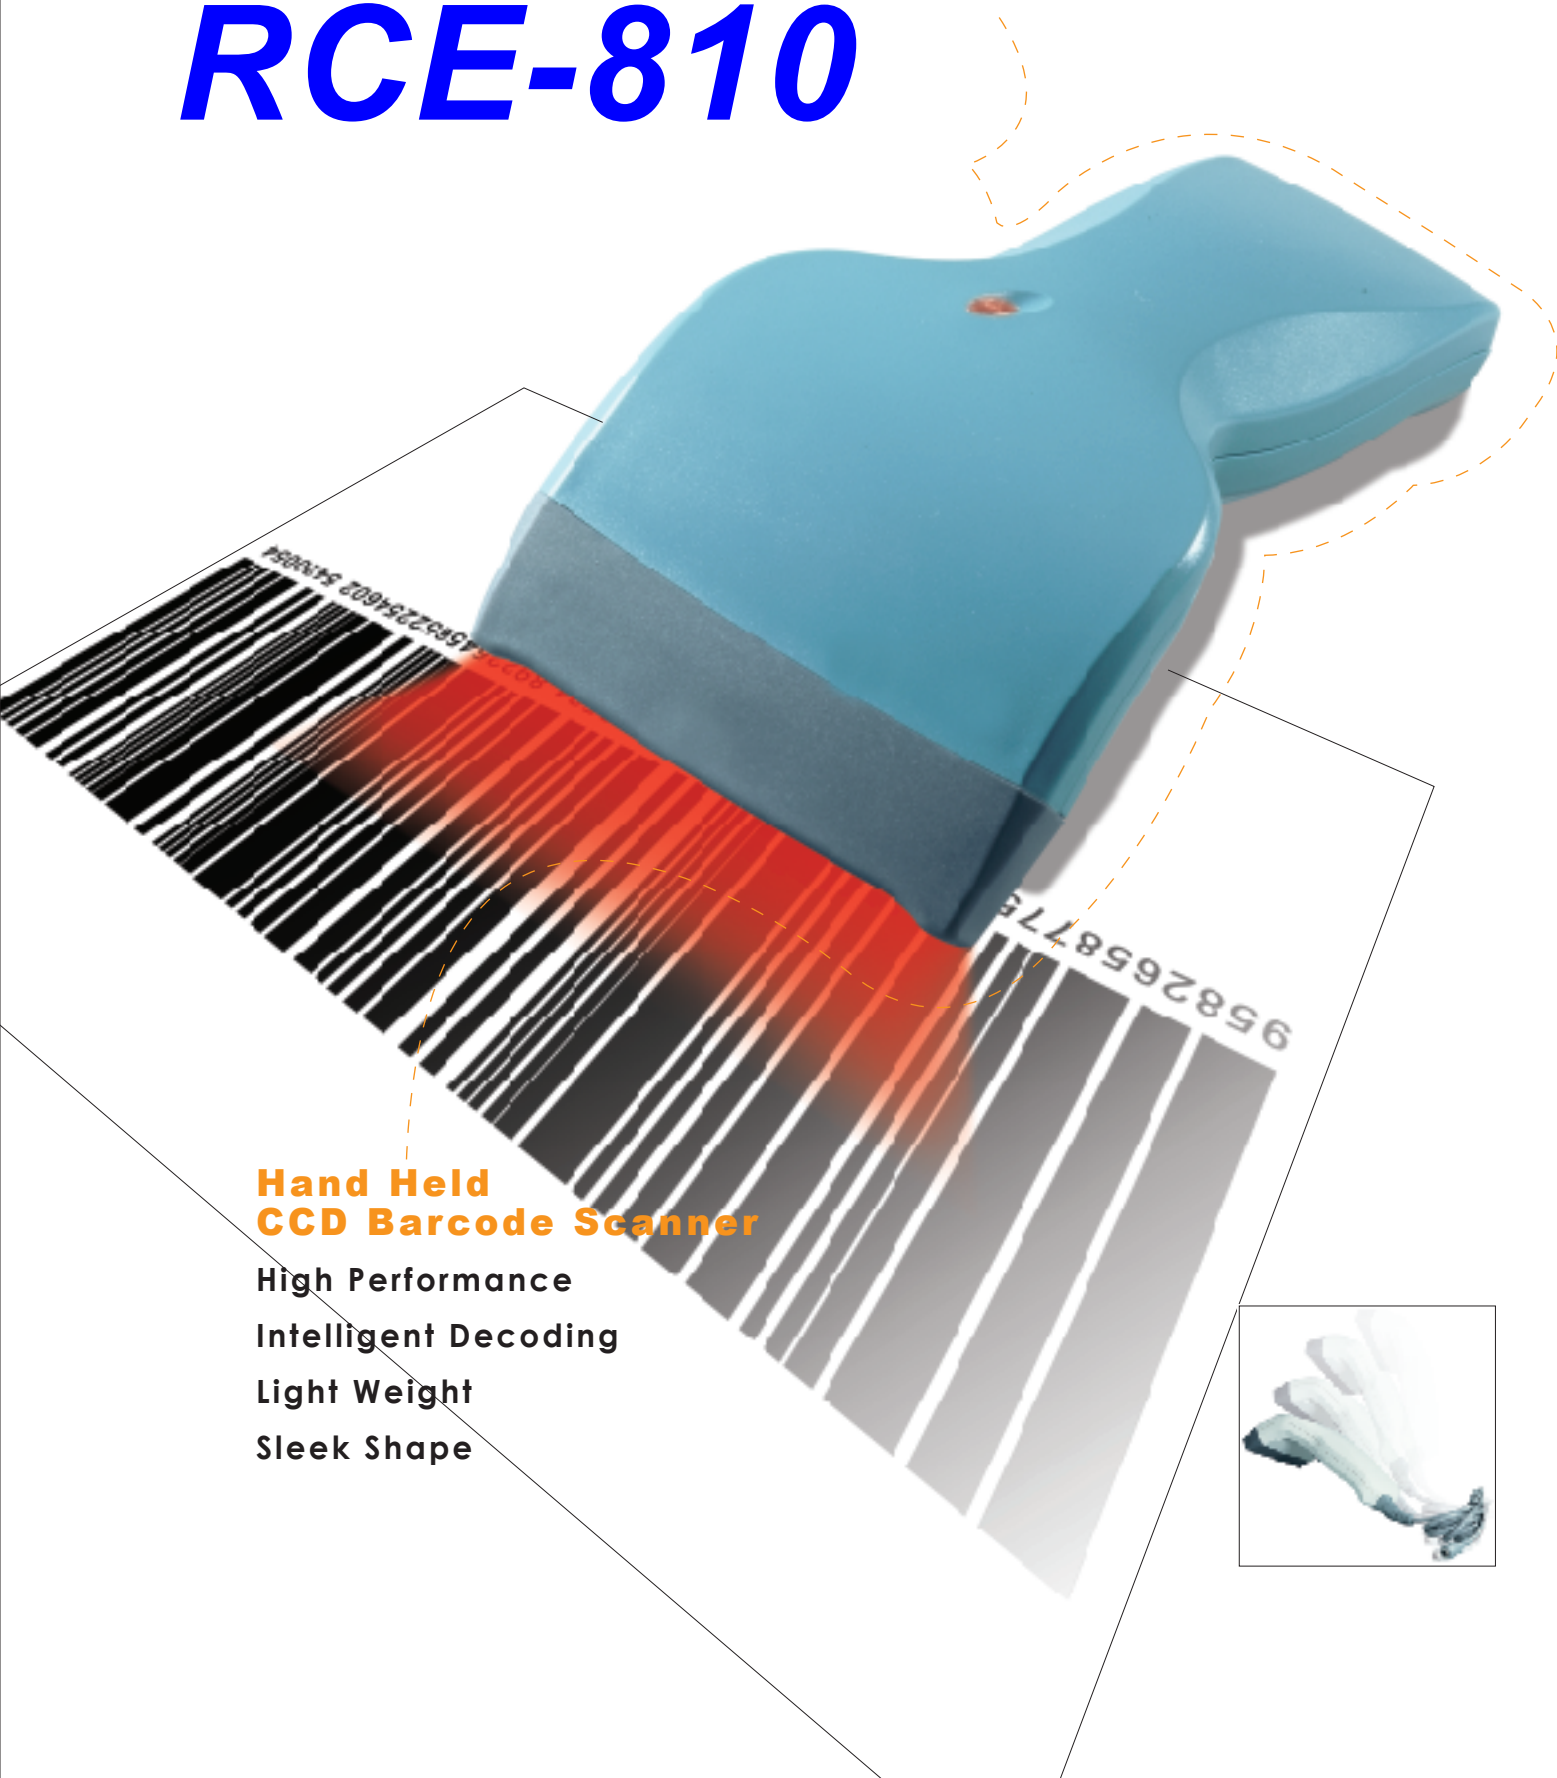

RCE S.r.l.
Via Salvatore Calenda, 6A
84126 SALERNO
Tel. 089 252625 - Fax 178 2726634
www.rce.it - e-mail vendite@rce.it

SPECIFICATION

ELECTRICAL

Operating Voltage	5V ±5%
Operating Current	84mA
Standby Current	14mA
EMI	CE, FCC Class A

OPTICAL

Light Source	Red LED Array(660nm)
Photo Sensor	2048 Pixel CCD array
Resolution	0.1mm (4 Mil) 0.3PCS
Width of Field	75mm (2.95inch)
Depth of Field	40mm (1.57inch); 0.25mm (10mil) 0.9PCS
Scan Rate	55~100 scans/sec.

PHYSICAL

Dimensions	170mm(L)×85mm(W)×52mm(H)
Case Material	ABS
Cable	1.8 meter (70inch), Straight
Weight	120g(without cable), 220g(with cable)

ENVIRONMENT

Operating Temperature	0°C ~50°C (32°F ~122°F)
Storage Temperature	-10°C ~60°C (-4°F ~140°F)
Relative Humidity	5% to 95% non-condensing

INTERFACE

RCE-810K	PC,AT,PS2...,MAC,Notebook. (With PS2 cable) * Notebook (No need keyboard Emulator)
RCE-810U	USB (with USB cable)
RCE-810R	RS-232 (with RS-232 cable)
RCE-810W	WAND
RCE-810T	TTL
Reading Indicator	LED & BEEP
Barcode Decoding	Code 39, Code 32, CIP39, Code Bar (CLSI), EAN-13 UPC-A, EAN-8, UPC-E (Add on 2/5), MSI/Plessey (UK Plessey), Code 128 (EAN 128), Code 93, Code 11, Interleaved 2/5, Industrial 2/5, Matrix 2/5, China Postal Code, Telepen.

ProTRACER Hand Held CCD Barcode Scanner

